


DESIGN DATA		
Description	unit	Values
Customer spec.		Welds to EN ISO 15614-1
Design code		EN 13445
PED 2014/68/EU		Category II module A2
Medium		Air/Inert gasses
Capacity	Ltr.	25
Design pressure	Bar(g)	11,0
Operating pressure	Bar(g)	0-11
Hydrostatic test	Bar(g)	16 (15 minutes)
Design temperature	°C	-10°C - 100°C
Corrosion allowance		0
Joint efficiency		0,85
Radiographic / other N.D.T.		N.A.
Heat treatment		N.A.
Insulation		N.A.
Weight empty	kg	8,5
Weight full	kg	8,5

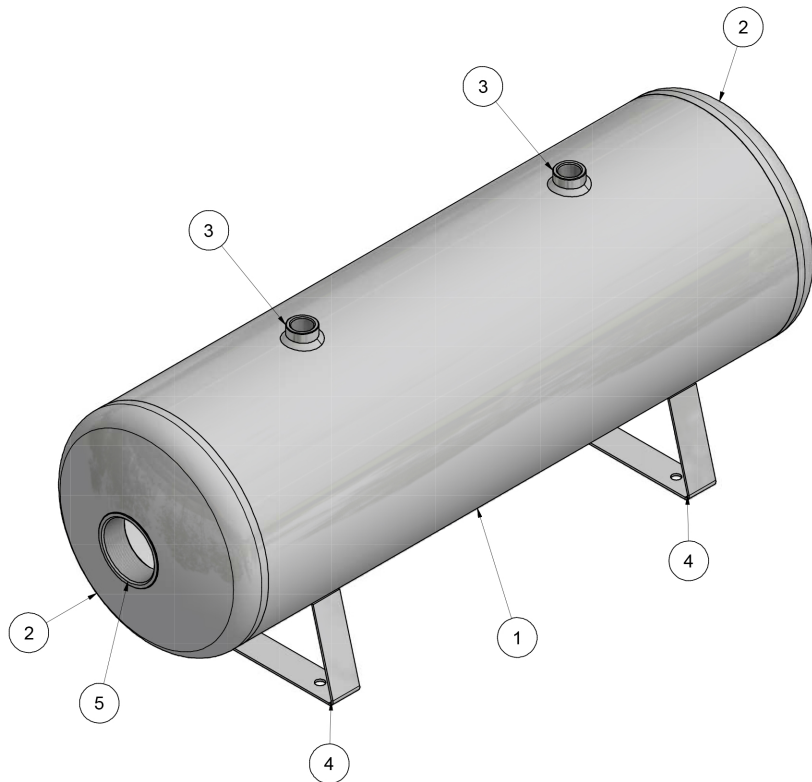

ATNL0250-SS-X3

Tank number:	1700060-01	Volume:	25 ltr.	CE
Year of construction:	2017	Category:	Cat. II mod. A2	
Design pressure:	11 Bar (g)	Design temp.:	-10°C - 100°C	
Test pressure:	16 Bar (g)	Medium:	Air/N2	

Materiaal: 1.4301 / 1.4307
Finish: Beitsen en glasparel stralen

5	2	Sok 2" half H=26mm	RVS.319.016
4	2	Voetsteun s=2 0250	PLA.100.011
3	3	Sok 1/2" half H=15mm	RVS.319.014
2	2	Laskap ø219,1x2 H=50	RVS.109.007
1	1	Buis ø219,1x2 L=595	BUI.104.004

Scale: 1:4

Designer:

Date:

Comments

Art.nr.: ITS.114.830

Weight: 8,786 kg

ATNL0250-SS-X3



INTER-TECHNICS B.V.
De Sleutel 11
5652 AS Eindhoven
+31 (0)85 110 9000
info@intertech.nl
www.intertech.nl

Richtlijn voor tekeningen



Size
A2

Partnumber

-

Ruimte volgens NEN 3634
Maattoleranties volgens NEN-ISO 408
Vorm en plaatstoleranties volgens NEN-ISO 1101